



## Universal-Gooseneck

35t

### Datasheet:

- 5th wheel plate supported on ball bearing race ring, including 3 1/2" - king pin and adjustable steering wedge
- Integrated hydro-mechanical double steering for activating the steering system
- Lifting and lowering by means of hydraulic, including hydraulic supporting cylinders
- Hydraulic differential gear
- Hydraulic connection to the prime mover
- Clearance radius 2,800 mm for usage of a 4 axle tractor
- Lubrication points brought together behind the steering box
- Operation devices for hydraulic functions on the left side, including protection cover
- Device for attaching claw coupling head of divers loading decks
- Integrated lashing coupling for attaching THP bogies
- 1 pair lashing rings in the rear, APS 8
- Hydraulic connection to tractor

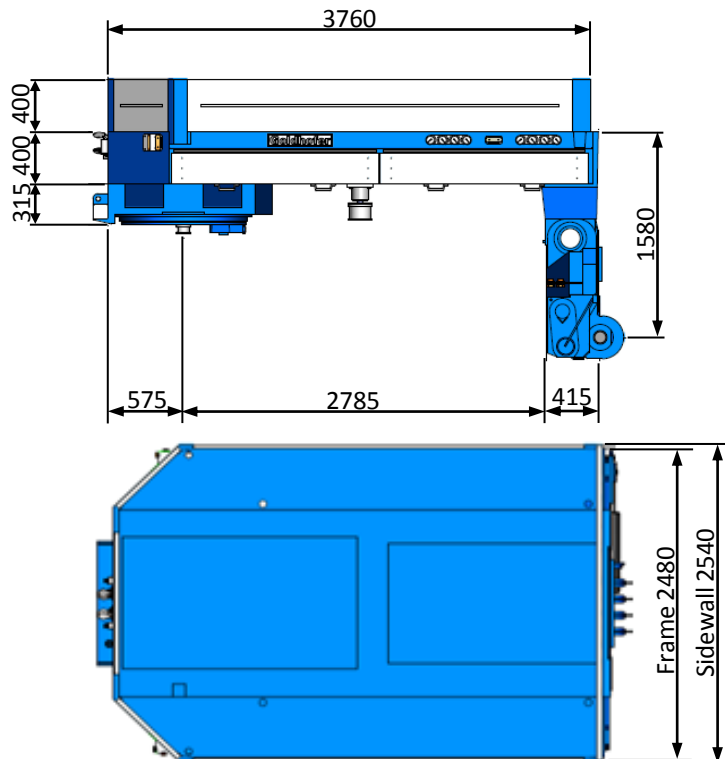

### Technical Data:

- Loading platform (approx. 3,700 x 2,440 mm) with chequered plate underneath
- Technical 5th wheel load 35 t
- Deadweight approx. 5,500 kg

### Extra Equipment:

- Side walls at four sides
- Hydraulic coupling bolt

### Remark:

The given loads are solely technical values.

They do not form a statement on legally permissible loads.

Illustration similar, drawing not to scale